



# CONCRETE PAVING JOINT SEAL DETAILS

BULLETIN  
**JS-1**

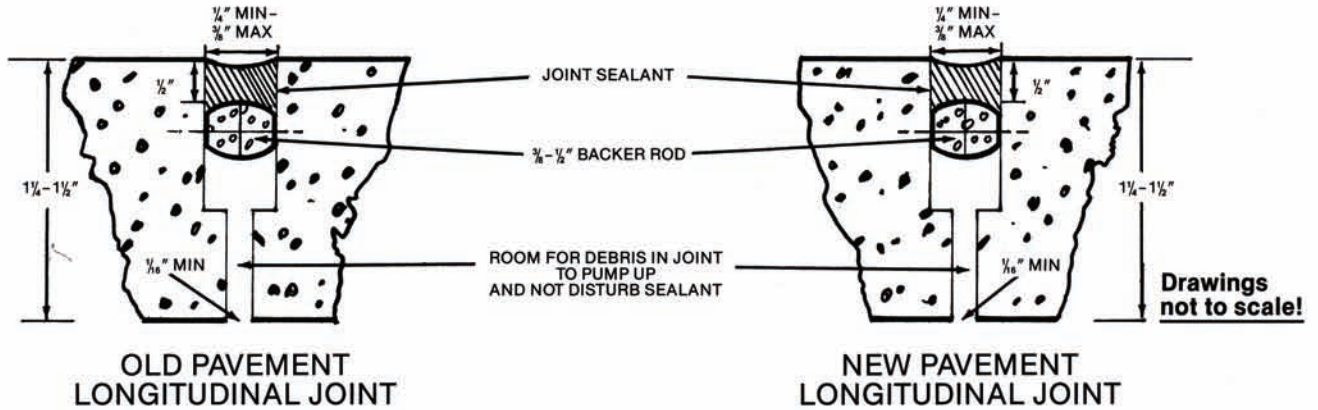

## LONGITUDINAL JOINT SEALS\* (NOTE 5)

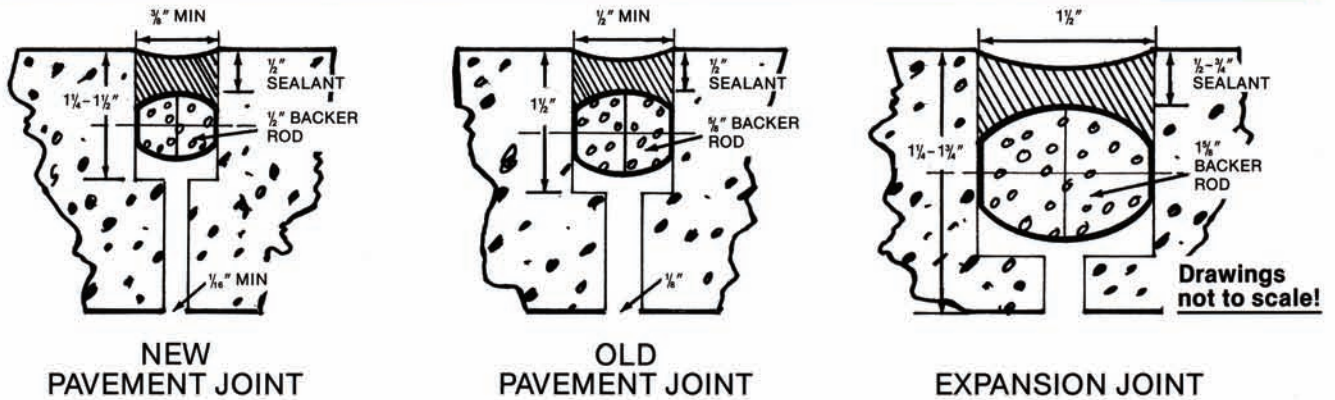

## TRANSVERSE JOINT SEALS

### **NITRILE** Joint Sealing Compound

#### GENERAL NOTES

1. Sealant should be installed to surface of joint.
2. Curing will provide proper shape factor.
3. Backer rod should **always** be 1/8" larger diameter than width of joint.
4. Backer rod shall be closed cell dense foamed polyethylene.
- \*5. Sealant thickness should be installed minimum of 1/2"
6. Pavement spacing longer than 20' should increase joint width 1/8"



**THE RUSCOE  
COMPANY**  
Adhesives &  
Sealants

